

#### TECHNICAL DATA / FEATURES

dimensions:  $\phi 150/143 \times 89$   
 light functions: passing, driving, parking  
 function markings: C/R, A  
 traffic: right-hand  
 reference mark: 7.5  
 source of light: R2, T4W  
 maximum power: 55/50W, 4W  
 nominal voltage: 12V-24V DC  
 optics: standard  
 IP rating: IP54  
 housing's material: metal  
 lens' material: glass  
 built-in connectors: -



#### ADDITIONAL INFORMATION



Particularly recommended for tractors and slow-moving vehicles.

To be mounted in factory designed locations or in the front bumper recesses.

Useful parts while installing:

- main bulb gasket - cat. No. A.05820
- parking light bulb holder - cat. No. A.05921
- main bulb mounting block - cat. No. A.07128

#### DIMENSIONS

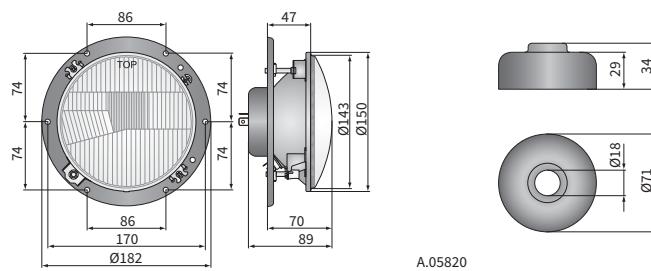

Cat. number	Homologation code	Light functions	Type	Accessories	Side						
<b>RE.41400</b>	032	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓	1	1
<b>RE.41401</b>	032	✓ ✓ ✓	✓ ✓ ✓	✓ ✓ ✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓	✓ ✓	1	1