

LEDDriving SL W16W RED

Ideal replacement for any vehicle




Suitable for various vehicle exterior applications

Available in Red




Replaces conventional W16W lamps

Easy upgrade to LED technology with plug & play solutions



Reliable OSRAM quality stands for less lamp replacements

4-year OSRAM guarantee (refer to www.osram.com/am-guarantee for precise conditions)

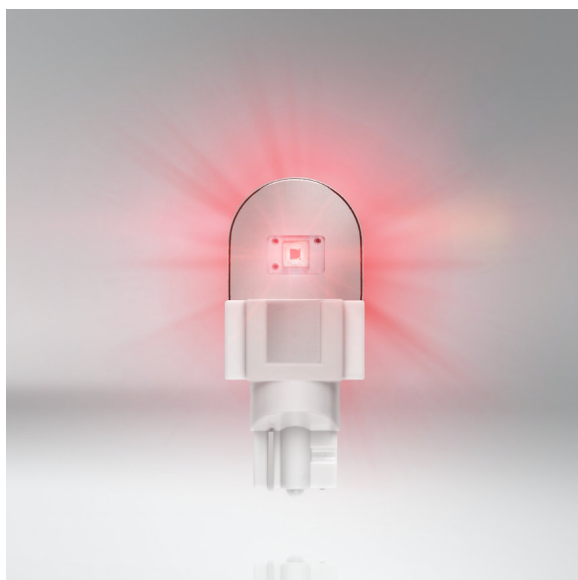

Suitable LED replacement for W16W

LEDDriving SL W16W replacement lamps offer a modern and intense light. These replacement lamps are suitable for all conventional W16W lamp bases. In comparison to standard lamps, these LED retrofit lamps use up to 80% less energy. OSRAM offers a 4 year guarantee for these LEDDriving SL lamps. These products do not have ECE approval and must not be used on public roads in any exterior application. Public roads use leads to cancellation of operating license and loss of insurance coverage. Several countries forbid sale and use of these products. Please contact your local distributor for further information.

Technical data

Product information

| | |
|---|--|
| Order reference | 921DRP |
| Product type (off-road vs. on-road) | Off-road \triangleq W16W |
| Application (Category and Product specific) | Mainly used for signal/ indicator applications |


Electrical data

| | |
|-----------------------|------------|
| Power input | 2 W |
| Nominal voltage | 12.0 V |
| Nominal wattage | 1.40 W |
| Test voltage | 13.5 V |
| Power input tolerance | ± 10 % |

Photometrical data

| | |
|-------------------------|------------|
| Luminous flux | 80 lm |
| Luminous flux tolerance | ± 25 % |
| Light color LED | Red |

Dimensions & weight



| | |
|----------------|---------|
| Diameter | 11.0 mm |
| Product weight | 2.50 g |
| Length | 35.7 mm |

Lifespan

| | |
|-------------|---------|
| Lifespan B3 | 1500 h |
| Lifespan Tc | 4000 h |
| Guarantee | 4 years |

Product datasheet

Additional product data

| | |
|-----------------------------|-----------|
| Base (standard designation) | W2.1x9.5d |
|-----------------------------|-----------|

Capabilities

| | |
|------------|-------------------|
| Technology | LED ¹⁾ |
|------------|-------------------|

¹⁾ Light-emitting diode lamp

Country specific categorizations



| | |
|-----------------|--------|
| Order reference | 921DRP |
|-----------------|--------|

Logistical Data

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|---------------------------------|---------------------------------|---|----------------------|--------------|
| 4062172160155 | LEDiving SL \triangle W16W | Blister 2 | - x - x - | | |
| 4062172160162 | LEDiving SL \triangle W16W | Shipping carton box 10 | 115 mm x 105 mm x 145 mm | 1.75 dm ³ | 125.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

| File | |
|---|---|
|  | Brochures LEDiving Retrofits - Exchange overview (EN) |
|  | Brochures 618438_LEDiving RETROFIT application overview (EN) |

Safety advice

Canbus compatible

Coloured lamps for usage behind coloured glass

Legal advice

These products do not have ECE approval and must not be used on public roads in any exterior application. Public roads use leads to cancellation of operating license and loss of insurance coverage. Several countries forbid sale and use of these products. Please contact your local distributor for further information.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM