



TECHNICAL DATA / FEATURES

- dimensions: 138x78x68
- light functions: fog light, driving
- function markings: B, F3, HR
- reference mark: -, 12.5
- source of light: H3
- maximum power: 70W
- nominal voltage: 12V-24V DC
- optics: standard
- IP rating: IP66
- housing's material: plastic
- housing's colour: black
- lens' material: glass
- lens' colour: clear, amber
- mounting: M8
- built-in connectors: -
- other: semipermeable membrane blister pack (option)



ADDITIONAL INFORMATION

Mounting: factory prepared places, built-in to vehicle's recess, as a freestanding on the body work. They can be installed in an upright or upside down position.

It is possible to install needed connectors on wire (on request).





Additional equipment:

- stone guard - cat. No. A37900
- lens cover - cat. No. A.37901

Useful parts while installing:

- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- deutsch plug DT06-2S 2-pin - cat. No. A.07135

DIMENSIONS

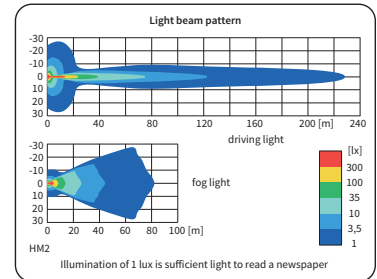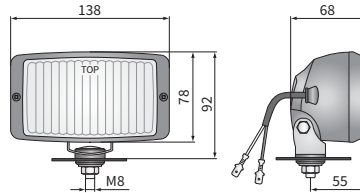

Cat. number	Homologation code	Light functions		Function markings			Lens colour		Accessories				Side			Connectors		Packaging / pc	
		fog light	driving	B	F3	HR	clear	amber	bulb H3 12V	bulb H3 24V	cable 0,15 m	cable 0,5 m	right	left	Deutsch DT	AMP SuperSeal 1,5	Cap / Pin	carton box	blister pack
HM2.19071	198	✓		✓			✓					✓	✓					1	
HM2.19873	198	✓		✓			✓					✓	✓						2
HM2.19473	198	✓		✓			✓				✓	✓	✓					1	
HM2.19472	198	✓		✓			✓				✓	✓	✓					1	
HM2.20274	198	✓		✓			✓				✓	✓	✓						2
HM2.19171	198	✓		✓				✓				✓	✓					1	
HM2.19973	198	✓		✓					✓			✓	✓						2
HM2.19572	198	✓		✓							✓	✓	✓					1	
HM2.19883	069	✓			✓		✓					✓	✓						2
HM2.19485	069	✓			✓		✓				✓	✓	✓	✓		2		1	
HM2.19271	200		✓				✓					✓	✓					1	
HM2.20073	200		✓				✓					✓	✓						2
HM2.19672	200		✓				✓				✓	✓	✓					1	
HM2.20474	200		✓				✓				✓	✓	✓						2
HM2.19371	200		✓				✓					✓	✓					1	
HM2.20173	200		✓				✓					✓	✓						2