

NIGHT BREAKER LED SPEED H7



Halogen out - Night Breaker LED in. Quick and easy. With OSRAM's street-legal¹⁾ NIGHT BREAKER LED SPEED H7.

Quick to install, easy to mount with the latest innovative OSRAM electronics inside and a 1:1 design outside. The NIGHT BREAKER LED SPEED H7 not only combines mechanical compatibility and innovative electronics with an identical 1:1 design to traditional lamps, but also all the advanced features and benefits of OSRAM's street-legal¹⁾ LED lamps. For a maximum of speed and simplicity when installing and replacing your halogen bulbs and a high-quality upgrade in terms of seen and be seen with street-legal OSRAM LED lamps. With the street-legal¹⁾ NIGHT BREAKER LED SPEED H7 you can now upgrade the function of your high- and low beam lights of your vehicle to state-of-the-art LED technology. There is no need for additional caps or adapters anymore to get the lamp installed. These LED replacement lamps are suitable as a replacement for conventional lamps and bases. They offer a modern and bright white light with a color temperature of up to 6000 Kelvin, a stable lumen output even at low battery voltage and impress with its superior brightness²⁾, while the glare of other road users falls below the permissible maximum values by up to 50%²⁾. In comparison to standard lamps, such as halogen lamps, these LED retrofit lamps consume up to 60% less energy and convince thanks to the LED technology and the specially developed vibration-resistant design, with up to 6 times longer life time³⁾. You can now replace your conventional vehicle lamps with OSRAM's revolutionary NIGHT BREAKER LED retrofit lamps and experience trend-setting brightness with road approval¹⁾. Additionally, OSRAM offers a dedicated guarantee on all NIGHT BREAKER LED retrofit lamps²⁾.

Technical data

Product information

Product legal advice 1	1) Approved LED light source - only applies to the respective countries in which there is approval or to which an equivalent approval applies and the vehicle models and light functions currently listed in the compatibility list. For more details see www.osram.com/nb-led
Product legal advice 2	2) In comparison to the minimum requirements of ECE R112, while the glare is below the maximum permissible values by up to 50%
Product legal advice 3	3) In comparison to traditional Halogen lamps
Application (Category and Product specific)	High and low beam

General Product Information

Global order reference	64210DWNBSP-2HB
------------------------	-----------------


Electrical Data

Power input	16.0 W
Test voltage	13.2 V
Power input tolerance	±20 %
Nominal wattage	16 W
Nominal voltage	12.0 V

Photometric Data

Color temperature	6000 K
Nominal luminous flux	1550 lm
Luminous flux tolerance	-13% / +7 %
Light color LED	Cool white

Physical Attributes & Dimensions

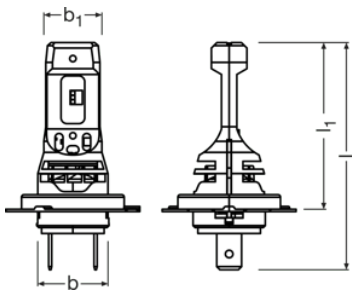

Product weight	16.00 g
Length	58.0 mm

Lifetime Data

Lifespan Tc	3000 hr
Lifespan B3	1500 hr

Capabilities

Technology	LED
------------	-----

Certificates & standards

Standards	ABG
-----------	-----

Environmental & Regulatory Information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Primary article identifier	4062172411264
Candidate list substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe use instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration no. in SCIP database	68efd73d-dc42-4d5c-b645-e9b5578c55b0

Logistical Data


Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172411264	NIGHT BREAKER SPEED H7 LED	HFB 2	100 mm x 51 mm x 119 mm	0.61 dm ³	81.00 g

Product datasheet

4062172411271	NIGHT BREAKER SPEED H7 LED	Shipping carton box 4	113 mm x 111 mm x 134 mm	1.68 dm ³	213.00 g
---------------	-------------------------------	--------------------------	-----------------------------	----------------------	----------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

File	
	User instruction GPRS_Safety symbols instructions

Safety advice

Application advice:

For more detailed application information and graphics please see product datasheet and user manual.

Translation advice:

- Actual Size -
- Plastic free packaging -
- Light comparison -
- Approval Document -
- Accessories -
- Application -
- Content -
- Technology Comparison -
- Benefits -
- Superior Brightness -

Legal advice

- 1) Approved LED light source - only applies to the respective countries in which there is approval or to which an equivalent approval applies and the vehicle models and light functions currently listed in the compatibility list. For more details see www.osram.com/nb-led
- 2) Compared to the minimum requirements of ECE R112, while the glare is below the maximum permissible values by up to 50%
- 3) In comparison to traditional Halogen lamps
- 4) For precise conditions please refer to: www.osram.com/am-guarantee

Product datasheet

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

The OSRAM logo is displayed in a bold, orange, sans-serif font.