

DIADEM CHROME PY21W

Only amber during operation



Chrome design

Thanks to cutting edge interference and absorber coating



Amber when ON

Only amber when operating, otherwise almost invisible



Homogenous appearance

Reflector has a fully homogenous chrome look



The design light with chrome look

OSRAM DIADEM CHROME signal lamps convince with their exclusive design: a chrome look thanks to cutting edge interference and absorber coating. Only when operating, the lamps emit amber light. Otherwise they are almost invisible and have no irritating color effects. DIADEM CHROME are ideal for all indicator lights with clear covers.

Technical data

Product information

Order reference	7507DC
Application (Category and Product specific)	Auxiliary lamp


Electrical data

Power input	25 W
Nominal voltage	12.0 V
Nominal wattage	21.00 W
Test voltage	13.5 V
Power input tolerance	±6 %

Photometrical data

Luminous flux	280 lm
Luminous flux tolerance	±20 %

Dimensions & weight

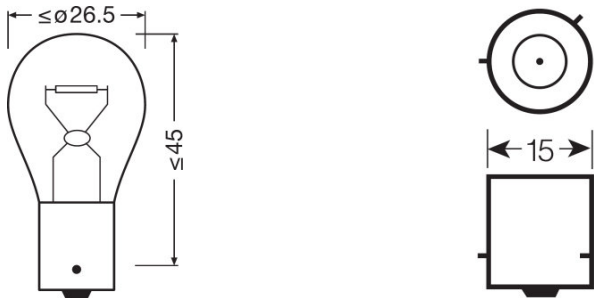

Diameter	25.0 mm
Product weight	8.00 g
Length	52.6 mm

Lifespan

Lifespan B3	100 h
Lifespan Tc	250 h

Additional product data

Base (standard designation)	BAU15s
-----------------------------	--------

Product datasheet

Capabilities

Technology	AUX
------------	-----

Certificates & standards

ECE category	PY21W
Approval marks – approval	E1 approval

Country specific categorizations

Order reference	7507DC
-----------------	--------

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321972774	DIADEM CHROME PY21W	Blister 2	135 mm x 95 mm x 26 mm	0.33 dm ³	27.00 g
4008321972781	DIADEM CHROME PY21W	Shipping carton box 20	279 mm x 144 mm x 113 mm	4.54 dm ³	346.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.



OSRAM